

Date: 23/02/2025

Qty.

Description

1 SQF 0.6-3 N



Note! Product picture may differ from actual product

Product No.: 95027327

The 3" SQFlex centrifugal pump is for medium heads and flow rates.

The SQFlex system is a reliable water supply system based on renewable energy sources, such as solar and wind energy.


Thanks to its flexible energy supply and performance, the SQFlex system can be combined and adapted to meet any need on the installation site.

The SQFlex system has a wide voltage range, built-in maximum power point tracking (MPPT) as well as dry-running, voltage and overload protection.



Date: 23/02/2025


95027327 SQF 0.6-3 N 50 Hz

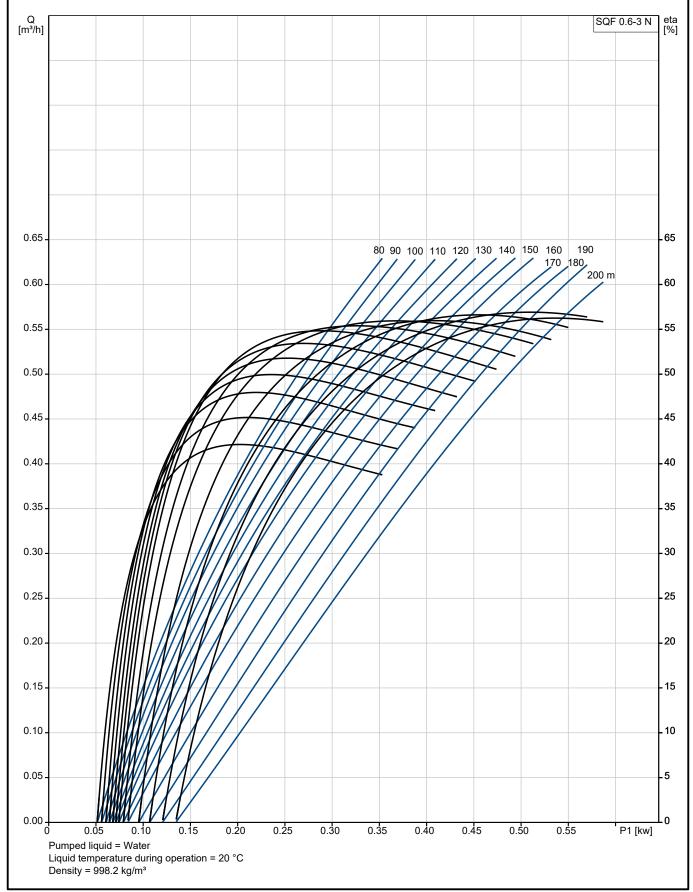





Date: 23/02/2025

Description	Value
General information:	0050001
Product name:	SQF 0.6-3 N
Product No: EAN number:	95027327 5700834791611
Price:	ZAR 45499
Technical:	ZAI\ 43499
Stages:	3
Approvals:	UKCA,CE,EAC,CN RoHS Exempt,Morocco, Sepro
Pump No:	95027409
Model:	С
Return valve:	Υ
Zinc Anodes:	No
Materials:	
Pump:	Stainless steel
	DIN WNr. 1.4401
	AISI 316
Impeller:	EN 1.4401
Motor:	Stainless steel
	DIN WNr. 1.4401
Determ	AISI 316 Stainless steel
Rotor:	DIN WNr. 1.4401
	AISI 316
Stator:	Stainless steel / EPDM
Ciator.	DIN WNr. 1.4401
	AISI 316
Installation:	,
Maximum ambient pressure:	15 bar
Maximum operating pressure:	15 bar
Type of connection:	Rp
Size of connection:	1 1/4 inch
Minimum borehole diameter:	76 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	MSF3N
Power input - P1:	1.4 kW 1 kW
Rated power - P2:	1 x 90-240 V
	1 X 90-240 V
Rated voltage AC:	30_300 \/
Rated voltage DC:	30-300 V 8 4 A
Rated voltage DC: Rated current:	8.4 A
Rated voltage DC: Rated current: Power factor:	8.4 A 1.0
Rated voltage DC: Rated current:	8.4 A
Rated voltage DC: Rated current: Power factor: Rated speed:	8.4 A 1.0 3600 rpm
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method:	8.4 A 1.0 3600 rpm direct-on-line
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5):	8.4 A 1.0 3600 rpm direct-on-line IP68
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5): Insulation class (IEC 85):	8.4 A 1.0 3600 rpm direct-on-line IP68
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5): Insulation class (IEC 85): Built-in motor protection:	8.4 A 1.0 3600 rpm direct-on-line IP68 F
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5): Insulation class (IEC 85): Built-in motor protection: Thermal protec:	8.4 A 1.0 3600 rpm direct-on-line IP68 F Y internal
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5): Insulation class (IEC 85): Built-in motor protection: Thermal protec: Length of cable:	8.4 A 1.0 3600 rpm direct-on-line IP68 F Y internal 2 m
Rated voltage DC: Rated current: Power factor: Rated speed: Start. method: Enclosure class (IEC 34-5): Insulation class (IEC 85): Built-in motor protection: Thermal protec: Length of cable: Motor No:	8.4 A 1.0 3600 rpm direct-on-line IP68 F Y internal 2 m 96275337

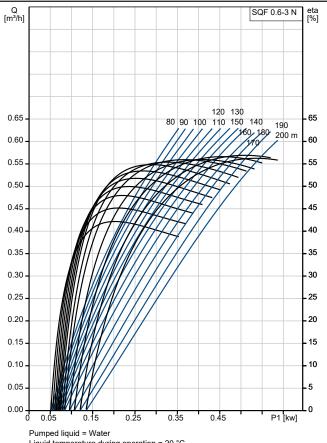

Pumped liquid = Water Liquid temperature during operation = 20 °C Density = 998.2 kg/m³








Date: 23/02/2025

Description	Value
Minimum efficiency index, MEI ≥:	-,
Net weight:	7.9 kg
Gross weight:	9.7 kg
Shipping volume:	0.024 m³
Sales region:	Europe/South America/Japan
Country of origin:	MX
Custom tariff no.:	84137025



23/02/2025 Date:

95027327 SQF 0.6-3 N 50 Hz

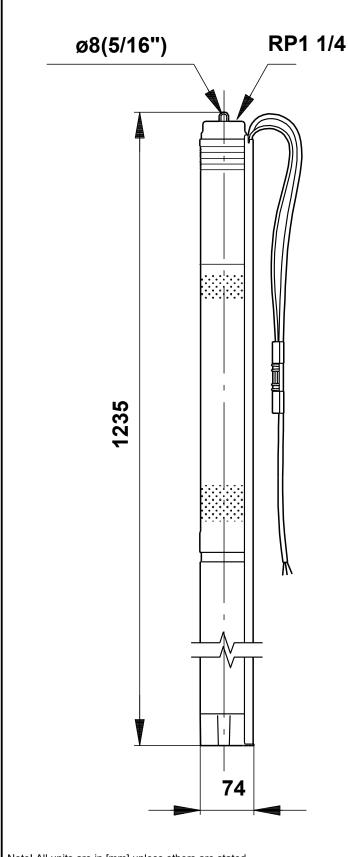



Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.



Date: 23/02/2025

95027327 SQF 0.6-3 N 50 Hz

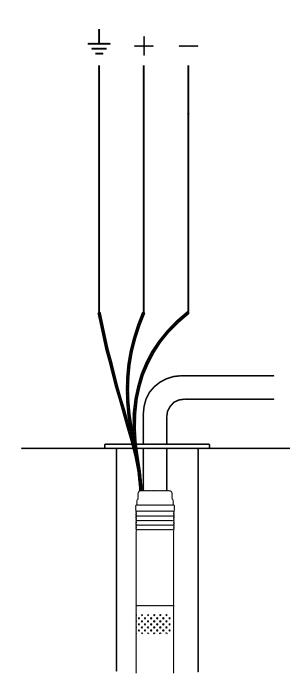

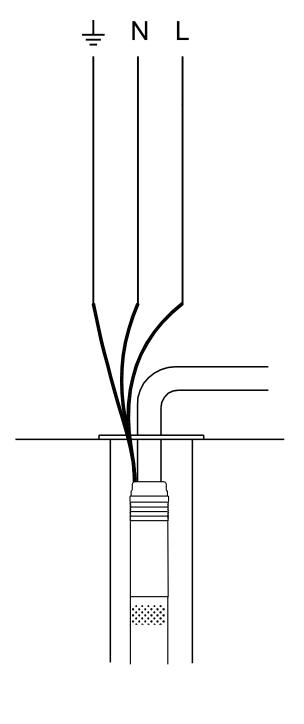

Note! All units are in [mm] unless others are stated.