

Date: 23/02/2025

Qty.

Description

1 SQF 7-4 N



Note! Product picture may differ from actual product

Product No.: 98994902

The 4" SQF centrifugal pump is for low heads and large flow rates.

The SQFlex system is a reliable water supply system based on renewable energy sources, such as solar and wind energy.


Thanks to its flexible energy supply and performance, the SQFlex system can be combined and adapted to meet any need on the installation site.

The SQFlex system has a wide voltage range, built-in maximum power point tracking (MPPT) as well as dry-running, voltage and overload protection.



Date: 23/02/2025


98994902 SQF 7-4 N 50 Hz

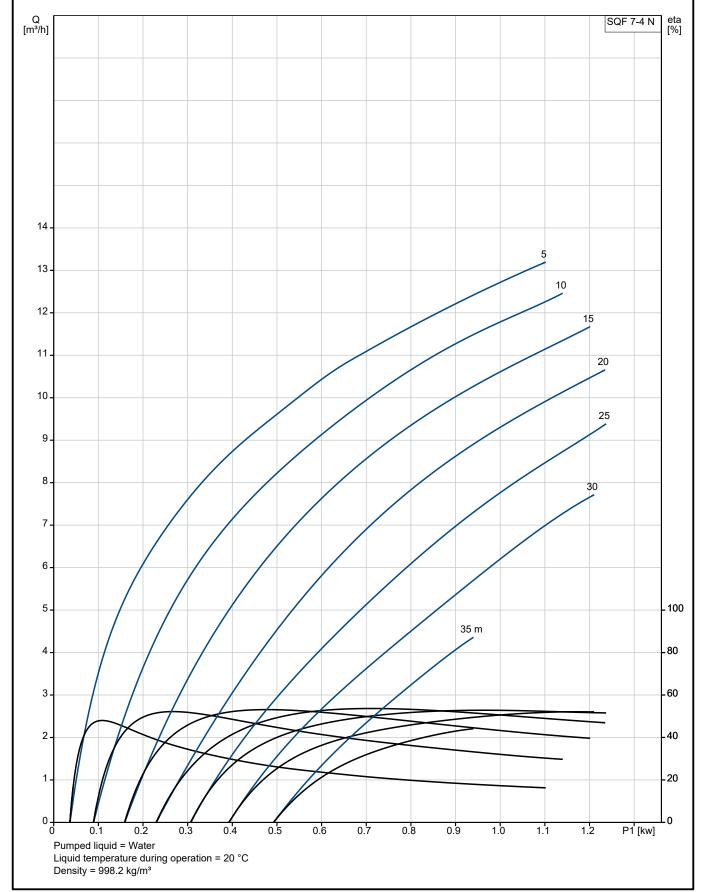





Date: 23/02/2025

Description	Value
General information:	
Product name:	SQF 7-4 N
Product No:	98994902
EAN number:	5712604876183
Price:	ZAR 47320
Technical:	
Stages:	4
Approvals:	UKCA,CE,EAC,CN RoHS Exempt,Morocco, Sepro
Pump No:	98994677
Model:	A
Return valve:	Υ
Zinc Anodes:	No
Materials:	
Pump:	Stainless steel
•	DIN WNr. 1.4401
	AISI 316
Impeller:	Stainless steel
1 *******	EN 1.4401
	AISI 316
Motor:	Stainless steel
Wiotor.	DIN WNr. 1.4401
	AISI 316
Rotor:	Stainless steel
NOIUI.	DIN WNr. 1.4401
	=
Ctatar	AISI 316
Stator:	Stainless steel / EPDM
	DIN WNr. 1.4401
la atallatia a	AISI 316
nstallation:	45 h - ::
Maximum ambient pressure:	15 bar
Maximum operating pressure:	15 bar
Type of connection:	Rp
Size of connection:	1 1/2 inch
Minimum borehole diameter:	104 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	MSF3N
Power input - P1:	1.4 kW
Rated power - P2:	1 kW
Rated voltage AC:	1 x 90-240 V
Rated voltage DC:	30-300 V
Rated current:	8.4 A
Power factor:	1.0
Rated speed:	3600 rpm
Start. method:	direct-on-line
	IP68
Enclosure class (IEC 34-5):	F
Insulation class (IEC 85):	·
Built-in motor protection:	Y
Thermal protec:	internal
Length of cable:	2 m
Motor No:	96275337
I I dia .	200 17

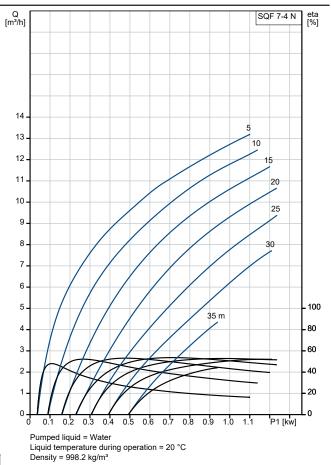



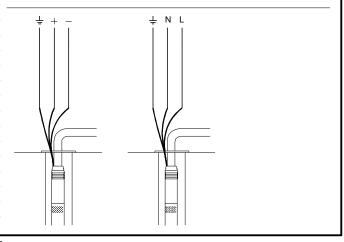

Udc:

300 V

30 V



Date: 23/02/2025


Description	Value
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	10.6 kg
Gross weight:	12.1 kg
Shipping volume:	0.028 m³
Sales region:	Europe/South America/Japan/Australia
Country of origin:	MX
Custom tariff no.:	84137025



23/02/2025 Date:

98994902 SQF 7-4 N 50 Hz

RP1 1/2

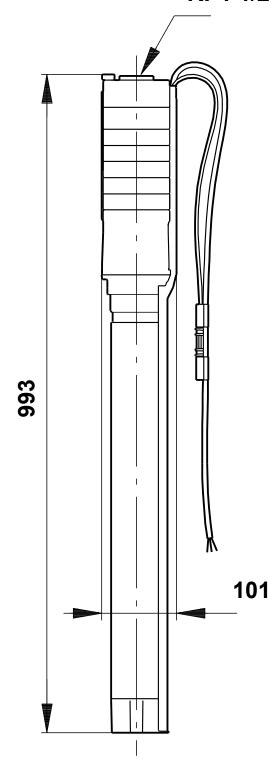



Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.



Date: 23/02/2025

98994902 SQF 7-4 N 50 Hz

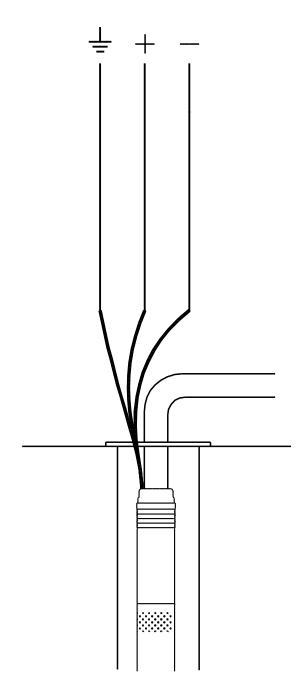

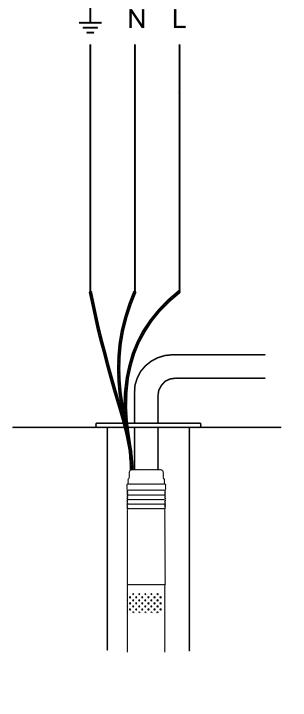

Note! All units are in [mm] unless others are stated.