



Project Name : Untitled project 2025-03-18 11:14:06.040	Project ID :
Company Name :	
Department :	
Phone number :	
e-mail address :	

Requested Data

Flow : 28.05 m ³ /h	Fluid : Water
Head : 131.4 m	Density : 0.9983 kg/dm ³
	Viscosity : 1.005 mm ² /s
	Temperature : 20 °C
	Vapour pressure at t A : 0.0234 bar

Pump

Operating Data

Pump Model : MVS-32/08T	Flow : 28.01 m ³ /h
No. of Stages : 8	Head : 131 m
Inlet / Outlet size : 74	Shutoff Head : 158 m
Speed : 2900 1/min	Efficiency : 77.45 %
Direction of Rotation : Counter clockwise	
Impeller type : Radial impeller	
Impeller Design : Closed	
Pump Weight (Approx) : 96.5 kg	
Pump Standard : CRI Standard	

Motor

Motor Model : MV 3P 20.0HP (IE2)	Insulation Class : F
Frequency/Efficiency class : 50 Hz IE2 = High Efficiency	Frame size : 160M
Rated Voltage : 380V-415V Δ / 660V-720V λ	Degree of Protection : IP 55
Rated current : 29.0A / 16.7A	Method of Starting : Star-delta
Phase / Rated Power P2 : 3~ 15 kW	Service factor : 1
Speed : 2870 1/min	Power factor : 0.84
Efficiency : 90.3 %	
Motor Weight (Approx) : 126 kg	
Motor Standard : IEC-60034-30 / IS-12615	

Material of Construction

Flange Connections

Pump Outer Shell : AISI 304	Suction Flange Pressure rating : PN 40 Nominal pipe size : DN 65 Standard : DIN EN 1092-1:2008-09 Discharge Flange Pressure rating : PN 40 Nominal pipe size : DN 65 Standard : DIN EN 1092-1:2008-09
Pump Head : AISI 304/CF8	
Pump Head Stool : C.I	
Pump Base : AISI 304/CF8	
Base Plate : C.I	
Impeller : AISI 304	
MECHANICAL SEAL : SiC/SiC/FKM	
Bush : SiC / SiC	
Diffuser (Chamber) : AISI 304	
Pump Shaft : AISI 431	
Wearing Ring : Teflon	
FLANGE : C.I	
Neck Ring : AISI 304	
O Ring : EPDM	
Coupling : C.I	
Split Cone : AISI 304	




Project Name : Untitled project 2025-03-18 11:14:06.040

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

Curve Tolerance ISO : 9906, Grade-3B

Speed 2900 rpm

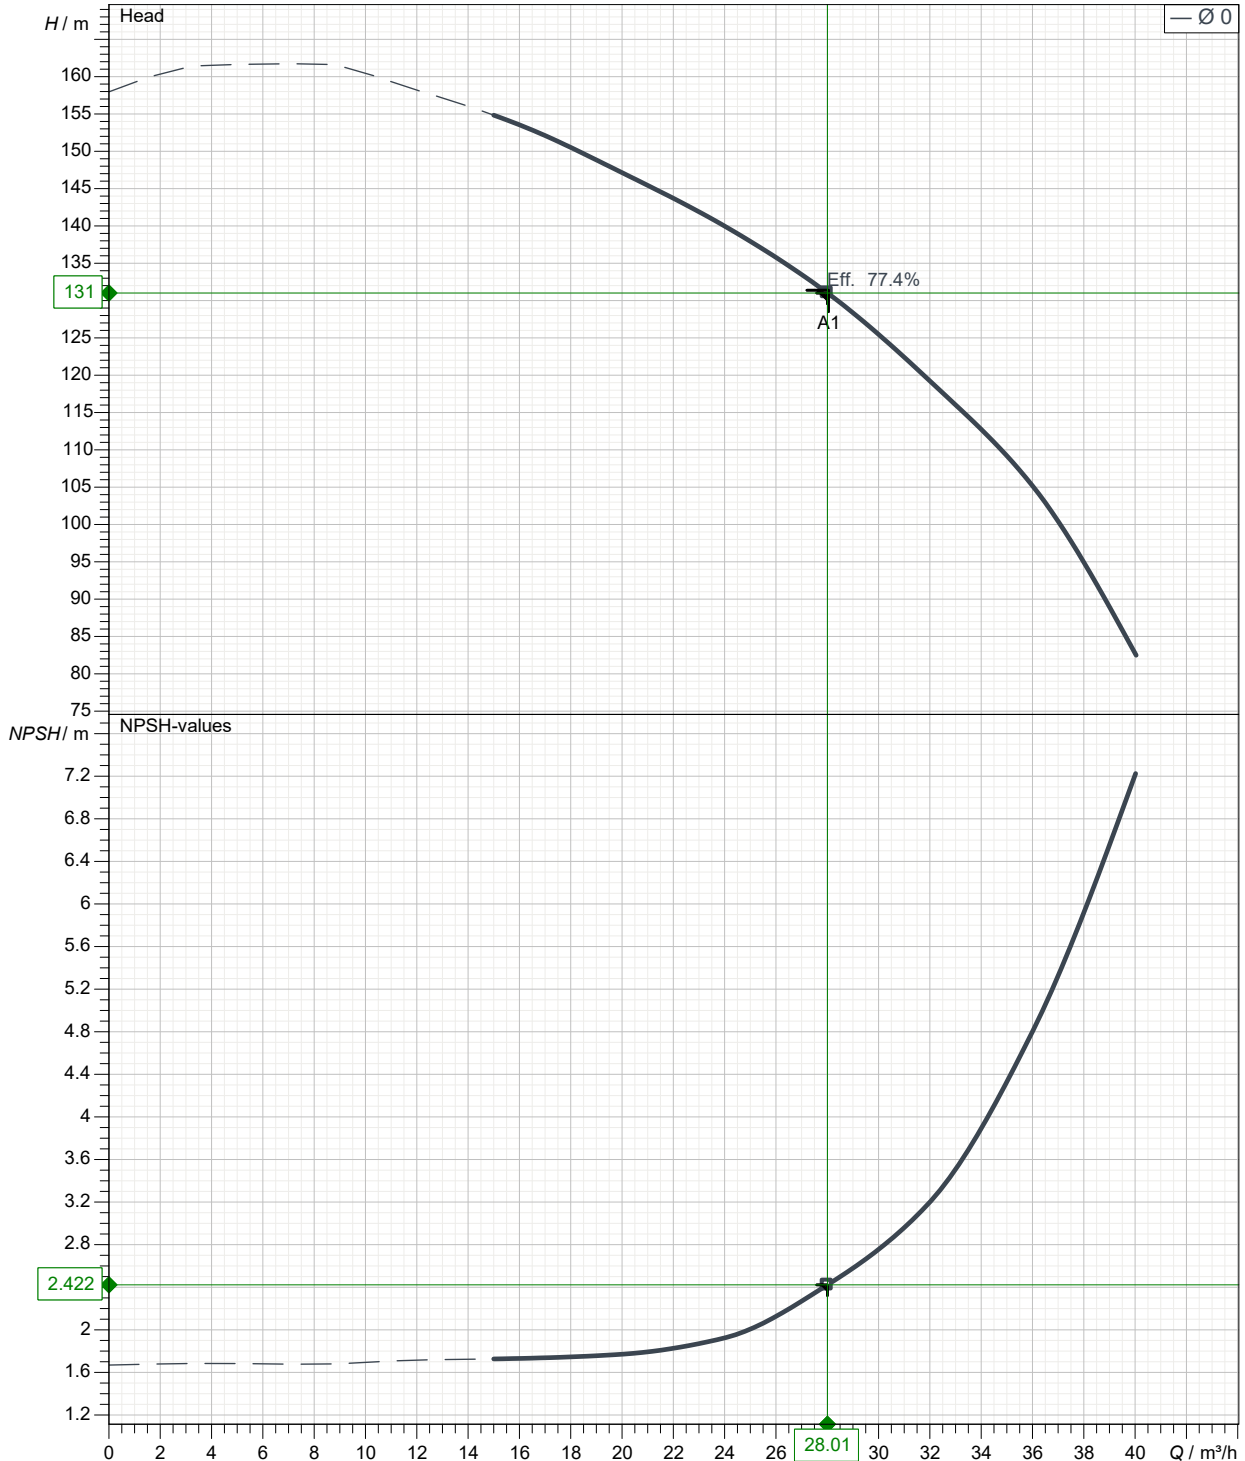




Project Name : Untitled project 2025-03-18 11:14:06.040

Project ID :

Company Name :
Department :
Phone number :
e-mail address :

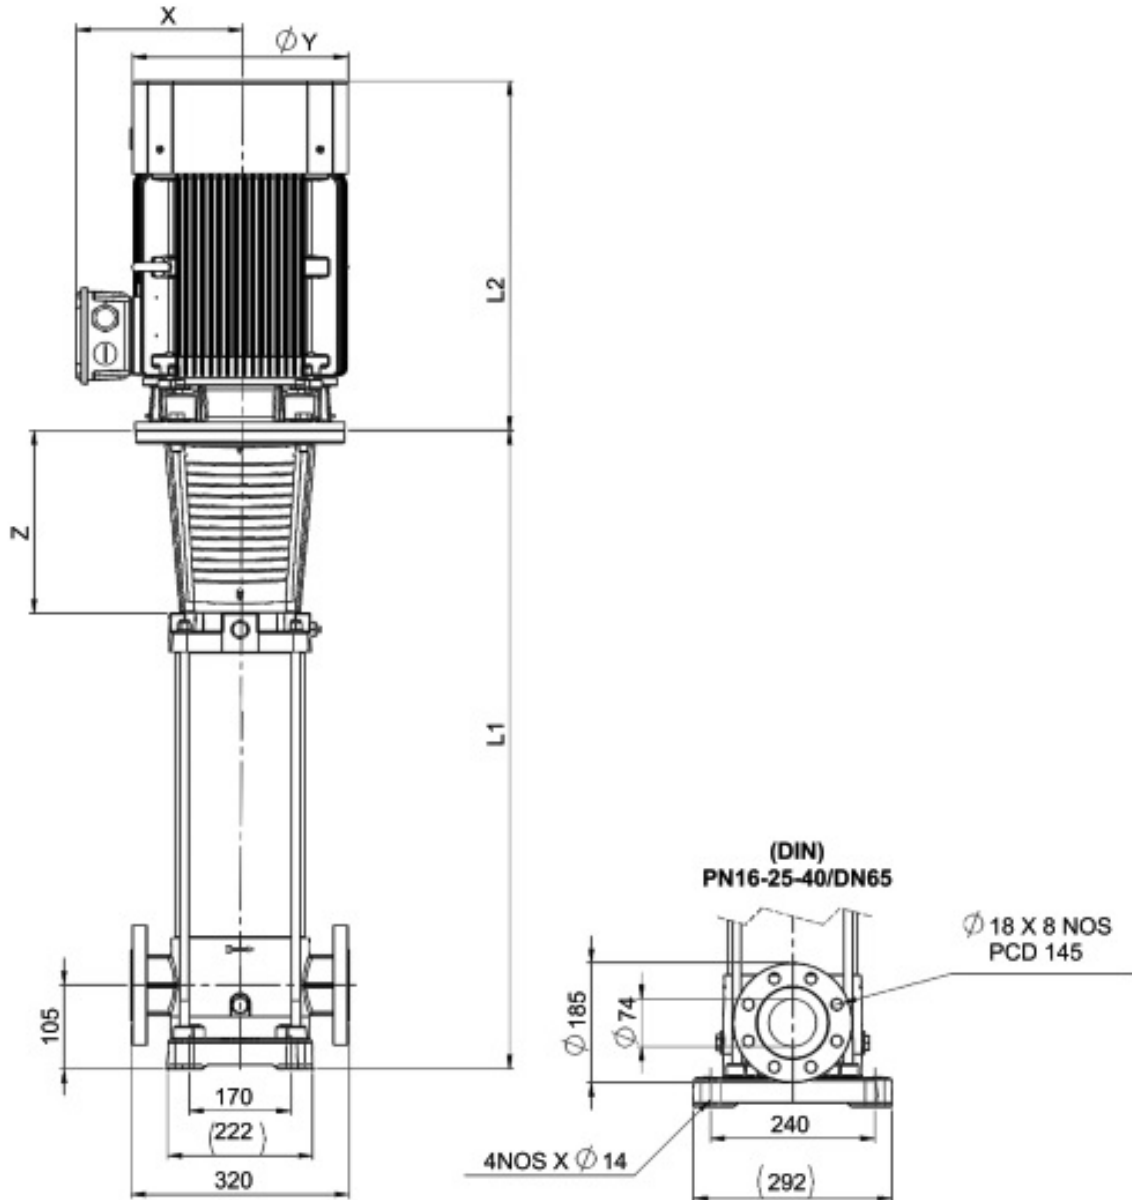

In View of continuous developments, The information/specifications/Description/ Illustrations are subject to change without notice.

Dimensions inmm

L1	1105		
L2	500		
OD	350		
X	263		
Y	320		
Z	305		