



Drainage Pumps - DL Series

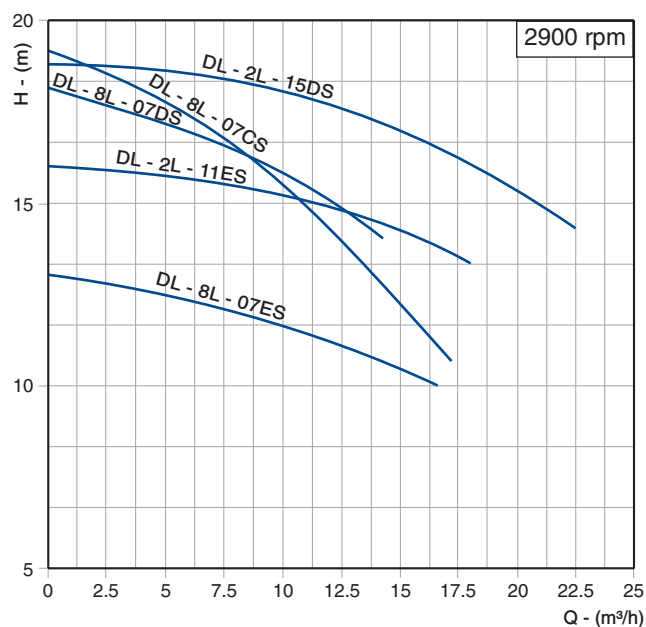

Impeller type	Impeller mtrl.
Closed Multi Channel	Cast Iron / PPO

Performance Curves & Data

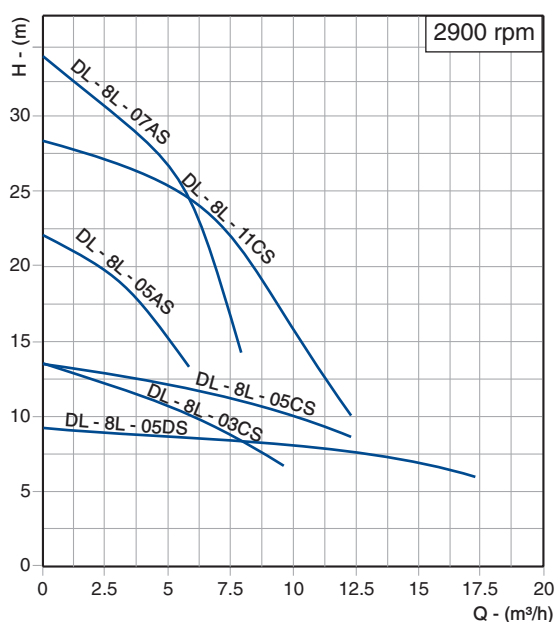

Model		Outlet Size (mm)	Motor Power		Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)
Single Phase	Three Phase		kW	HP				
DL - 8L - 03CS	DL - 8L - 03CT	40	0.37	0.5	10	6	13	12
DL - 8L - 05AS	DL - 8L - 05AT	25	0.55	0.75	19	3	22	15
DL - 8L - 05CS	DL - 8L - 05CT	40	0.55	0.75	10	10	13	16
DL - 8L - 05DS	DL - 8L - 05DT	50	0.55	0.75	7	15	9	16.5
DL - 8L - 07AS	DL - 8L - 07AT	25	0.75	1	27	5	34	17
DL - 8L - 07CS	DL - 8L - 07CT	40	0.75	1	17	7	19	17.5
DL - 8L - 07DS	DL - 8L - 07DT	50	0.75	1	16	10	18	17.5
DL - 8L - 07ES	DL - 8L - 07ET	65	0.75	1	11	15	13	18
DL - 8L - 11CS	DL - 8L - 11CT	40	1.1	1.5	24	6	28	19.5
DL - 2L - 11ES*	DL - 2L - 11ET*	65	1.1	1.5	14.5	15	16	19.5
DL - 2L - 15DS*	DL - 2L - 15DT*	50	1.5	2	17	15	18.5	22

Only single phase pumps are provided with float switch.

* Cast iron impeller.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.